

NEW

FORESTRY MULCHERS

UML/S/DTfrom **130 to 190 HP****Ø 25 cm max****FORESTRY MULCHER WITH FIXED TOOTH ROTOR.**


The UML/S/DT improves the most important aspects of the FAE mulcher experience. It introduces a new advanced design of mulchers. FAE's new forestry mulcher machine, the UML/S/DT replaces the former model UML/DT/HD.

**STANDARD EQUIPMENT**

PTO shaft with cam clutch
Gearbox with freewheel
Hydraulic hood
Enclosed machine body
Centralized greasing hub
Hydraulic hoses integrated in the frame
Cylinder protections, adjustable skids
Transmission with XPB belts
Interchangeable bolted on spike counter blade
Inner anti wear FCP plates
Bolted on protection chains

OPTIONS

Special skids to go underground
Mechanical push frame
Hydraulic push frame
W style self aligning device between PTO drive shaft/gearbox
Z style self ranging system of the PTO drive shaft/gearbox
Extra ripper for push frame
Interchangeable bolt on counter blades
Hydraulic top link
Multiple tooth options

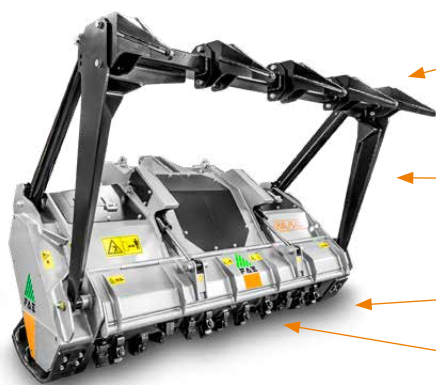**W style self aligning device between PTO drive shaft/gearbox**


allows the mulcher to work in several angles without damaging the PTO (optional)

Z style self ranging system of the PTO drive shaft/gearbox

always keeps the correct operating angle between the PTO shaft and the power take-off (optional)

Inner anti wear clad plates FCP absorbs wear while protecting the frame

Interchangeable bolted on spike counter blade can adjust final product size while operating



MODEL	Tractor (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth type C/3 + C/3/SS	No. teeth type I + C/3/SS
	min	max							
UML/S/DT 200	130	190	1000	2070	2430	1690	250	42+2	60+2
UML/S/DT 225	130	190	1000	2310	2670	1825	250	48+2	66+2

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.