

## EXCAVATOR MULCHERS

# DML/HY - DML/HY/VT



from 50 to 200 L/min



Ø12 cm max



from 5 to 13 t

## FORESTRY MULCHER WITH FIXED BLADE ROTOR FOR EXCAVATORS.

The DML/HY is the smallest, most versatile fixed hammer excavator mulcher on the market.


The VT automatic variable displacement hydraulic motor avoids any adjustment of the hydraulic levels on the excavator it is mounted too. Both doors can be activated mechanically or hydraulically (optional) to allow for the mulching of trees (front door) and fine and fibrous material that does not require preventive removal (rear door).

STANDARD EQUIPMENT	
Anti dust machine body	Protection chains
Belt transmission	Motor enclosed in frame
17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (DML/HY) - (50 - 115 L/min)	Supporting service leg
Safety and anticavitation valve (DML/HY)	OPTIONS
55/38cc variable torque hydraulic piston motor (DML/HY/VT) - (50 - 115 L/min)	32/65cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (DML/HY) - (90 - 200 L/min)
Flow control system valve	Customized setting hydraulic motor (DML/HY/VT)
Front hood with mechanical adjustment	Hydraulic rear hood
Rear hood with mechanical adjustment	Hydraulic front hood
Welded counter blade	Customized attachment bracket
	Customized attachment bracket with fixed thumb
	Multiple tooth options



**LIGHT AND POWERFUL**  
WITH FIXED TEETH

## FEATURES

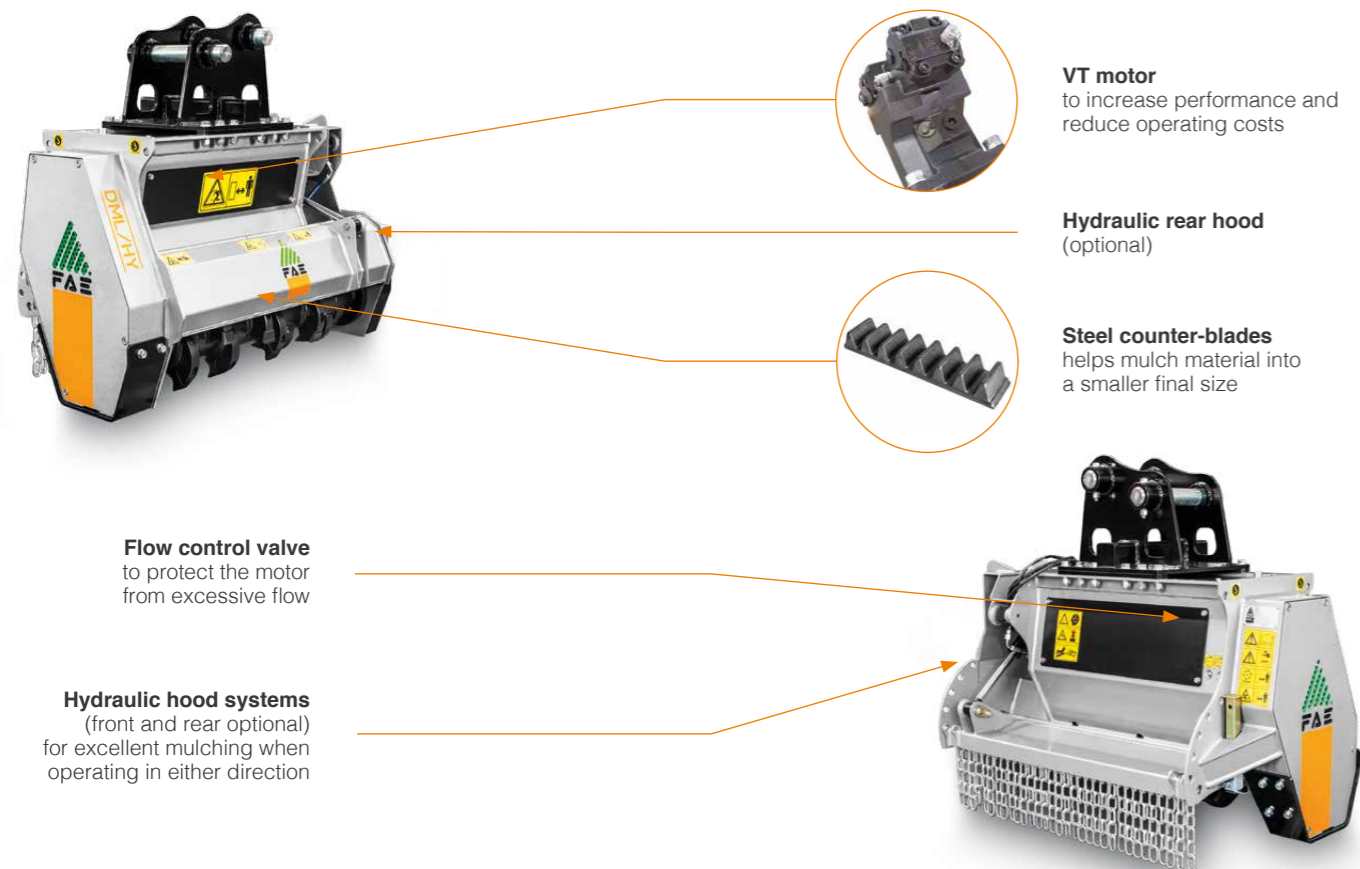

## MAIN OPTIONS



MODEL	Flow rate (L/min)		Pressure (bar)		Excavator weight (t)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. blades type E
	min	max	min	max	min	max				
DML/HY 75	50	115	180	250	5	13	800	470	120	20
DML/HY 100	50	115	180	250	5	13	1000	490	120	24
DML/HY 125	50	115	180	250	5	13	1240	510	120	30
DML/HY/VT 75*	90	115	180	345	5	13	800	470	120	20
DML/HY/VT 100*	90	115	180	345	5	13	1000	490	120	24
DML/HY/VT 125*	90	115	180	345	5	13	1240	510	120	30

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.  
\*Variable displacement hydraulic motor.